

---

## Interfacing AT93CXX Serial EEPROMs with AT89CX051 Microcontrollers

Serial memory devices offer significant advantages over parallel devices in applications where lower data transfer rates are acceptable. In addition to requiring less board space, serial devices allow microcontroller I/O pins to be conserved. This is especially valuable when adding external memory to low pin count microcontrollers such as the Atmel AT89C1051 and AT89C2051.

This application note presents a suite of software routines which may be incorporated into a user's application to allow AT89CX051 microcontrollers to read and write AT93CXX serial EEPROMs. All seven AT93CXX device functions are supported: read, write, write all, erase, erase all, erase/write enable and erase/write disable. The routines are general purpose, supporting both eight-bit and sixteen-bit accesses to all members of the 93CXX family. In addition, both 3-wire and 4-wire configurations are supported.

The AT93CXX may be connected to the AT89CX051 microcontroller in either a 3-

wire (Figure 1) or 4-wire (Figure 2) configuration. In the 3-wire configuration, the EEPROM serial data in (DI) and serial data out (DO) pins are both connected to the same microcontroller I/O pin, thereby saving a pin. This is possible because the microcontroller I/O pins can be dynamically reprogrammed as input or output.

Note the strapping of the AT93CXX ORG pins shown in Figure 1 and Figure 2. The ORG (internal organization) pin selects 8-bit data when grounded and 16-bit data when floating or tied to  $V_{CC}$ . The ORG pin connections shown in the figures are for illustration only; 8-bit or 16-bit data may be selected in either the 3-wire or 4-wire configuration.

The software for this application may be obtained by downloading from Atmel's Web Site or BBS. Consult the comment block at the beginning of the source code file for detailed information on features and operation.



Web Site: <http://www.atmel.com>

BBS: 1-(408) 436-4309



---

## Interfacing 93CXX Serial EEPROMs


---

## Application Note


Rev. 0521C-10/98



**Figure 1. 3-Wire Configuration**

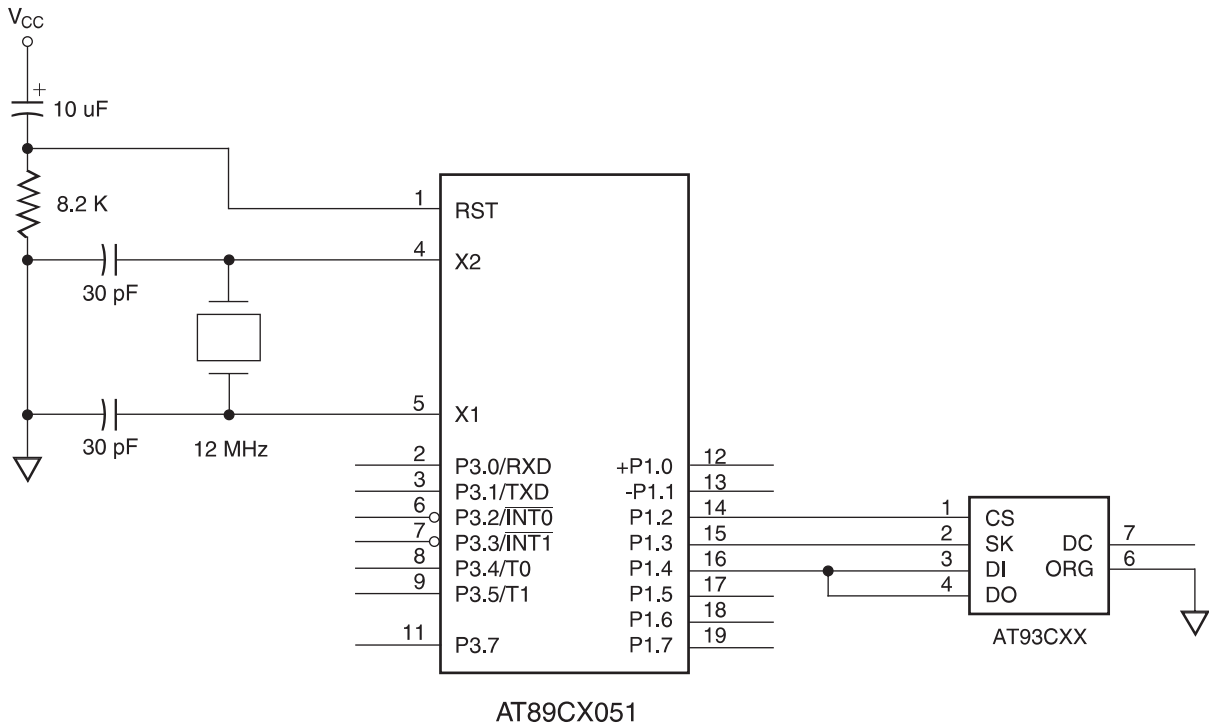

**Figure 2. Typical Circuit Configuration**

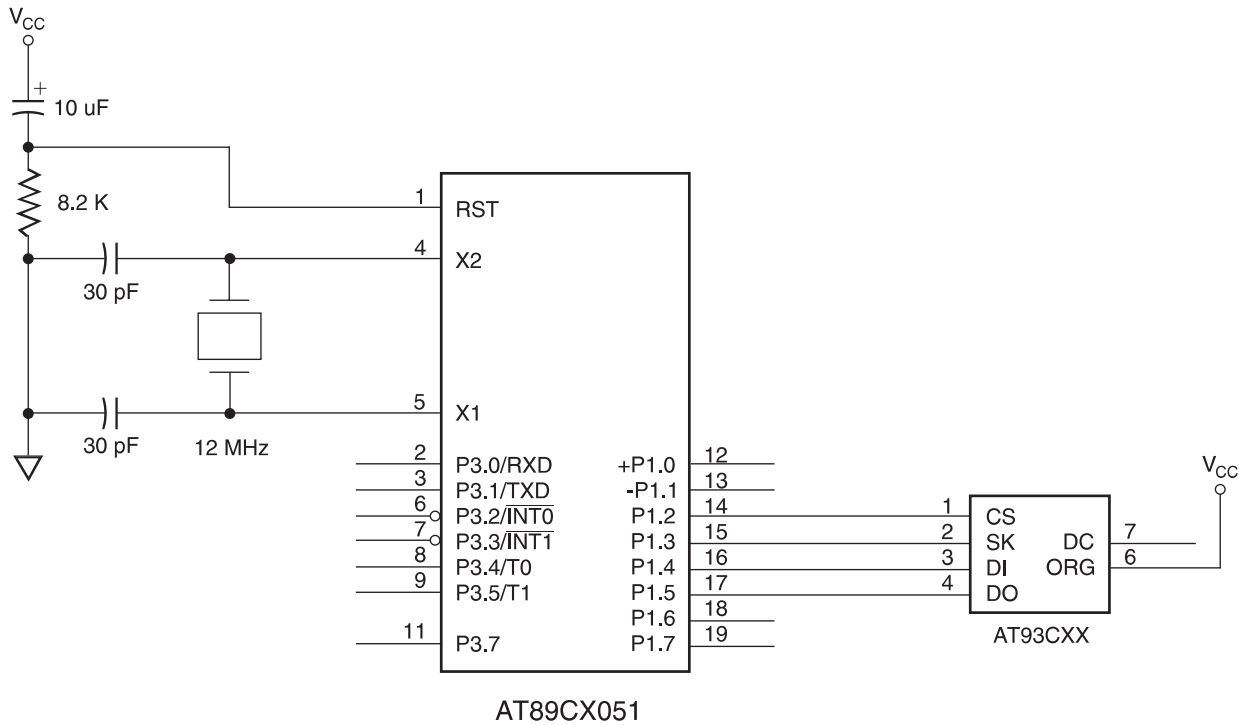





## Atmel Headquarters

**Corporate Headquarters**  
2325 Orchard Parkway  
San Jose, CA 95131  
TEL (408) 441-0311  
FAX (408) 487-2600

### Europe

Atmel U.K., Ltd.  
Coliseum Business Centre  
Riverside Way  
Camberley, Surrey GU15 3YL  
England  
TEL (44) 1276-686677  
FAX (44) 1276-686697

### Asia

Atmel Asia, Ltd.  
Room 1219  
Chinachem Golden Plaza  
77 Mody Road  
Tsimshatsui East  
Kowloon, Hong Kong  
TEL (852) 27219778  
FAX (852) 27221369

### Japan

Atmel Japan K.K.  
Tonetsu Shinkawa Bldg., 9F  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
TEL (81) 3-3523-3551  
FAX (81) 3-3523-7581

## Atmel Operations

**Atmel Colorado Springs**  
1150 E. Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL (719) 576-3300  
FAX (719) 540-1759

### Atmel Rousset

Zone Industrielle  
13106 Rousset Cedex, France  
TEL (33) 4 42 53 60 00  
FAX (33) 4 42 53 60 01

---

### ***Fax-on-Demand***

North America:  
1-(800) 292-8635  
International:  
1-(408) 441-0732

### ***e-mail***

[literature@atmel.com](mailto:literature@atmel.com)

### ***Web Site***

<http://www.atmel.com>

### ***BBS***

1-(408) 436-4309

### © Atmel Corporation 1998.

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's website. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

Marks bearing ® and/or ™ are registered trademarks and trademarks of Atmel Corporation.

Terms and product names in this document may be trademarks of others.



Printed on recycled paper.

0521C-10/98/xM