

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour : Ref Zhur - Khimiya, No. 8, 1957, 26691.

I were added to a solution of 135 g of II and 600 mlit of  $\text{CH}_3\text{OH}$  in 3 to 4 hours (at 0 to  $5^\circ$ ). After the complete disappearance of active chlorine,  $\text{Na}_2\text{SO}_3$  is added, all is distilled, the oil is separated and fractionated, a mixture of IIIa and IVa is received. A mixture of IIIb and IVb forming at the action of ethylhypochlorite on II was obtained under the same conditions, and the structure of IIIb and IVb was proved analogously with corresponding  $\text{C}_2\text{H}_5\text{O}$  analogues of V to X (Vb to Xb). The substances, boiling points/mm,  $n_{20}^D$ ,  $d_4^{20}$  are enumerated: Va - 88

to 88.5, 1.3840, 0.7546; Vb - 105 to 106, 1.3880, 0.7536; VIIa - 48 to 48.5/20, 0.9639; VIIb - 60 to 60.5/20, 1.4230, 0.9359; VIIIa -

Card 5/6

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour : Ref Zhur - Khimiya, No. 8, 1957, 26691.

89 to 90, 1.4062, 0.7888; IXa - 105 to 107,  
1.4535, 0.8350; IXb - 124 to 126, 1.4500,  
0.8294; Xa - 52.5 to 53.5/20, 1.4220, 0.882;  
Xb - 76.5 to 77/20, 1.4235, 0.8564. See report  
LXII in RZhKhim, 1957, 22847.

Card 6/6

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour : Ref Zhur - Khimiya, No. 8, 1957, 26692.

Author : Zyryanova, T.A.; Petrov, A.A.

Inst :

Title : Research in Region of Conjugate Systems.  
LXIV. Action of Benzenesulfodibromoamide  
on Piperylene Solutions in Methyl and Ethyl  
Alcohols.

Orig Pub : Zh. obshch. khimii, 1956, 26, No. 7, 1918 -  
1926.

Abstract : At the action of benzenesulfodibromoamide (I)  
on piperylene (II) solutions in methanol and  
ethanol, the addition of methylhypobromite,  
or correspondingly, of ethylhypobromite to II  
in the 3,4 and 1,4 positions takes place; the  
molar ratio of the 3,4 and 1,4 adducted matters  
is 2.5 : 1 to 3 : 1. II produces considerably

Card 1/6

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour : Ref Zhur - Khimiya, No. 8, 1957, 26692.

more 1,4 adducted matter than the earlier investigated divinyl. On the other hand, alkylhypobromites adjoin II in the 3,4 position to a greater degree than the earlier investigated alkylhypochlorites. 40 g of a mixture (A) with the boiling point at 65 to 71°/20 mm, of 4-bromo-3-metoxypentenol-2 (III) and 1-bromo-4-metoxypentenol-2 (IV) was received from 68 g of II (70 to 75% of the trans-form) and 94.5 g of I in 250 mlit of CH<sub>3</sub>OH under conditions described earlier; besides, methylpropenylketone forming obviously from III was separated. CH<sub>3</sub>COOH and BrCH<sub>2</sub>COOH were obtained by the ozonization of A. 56 g of A with 28 g of KOH in 180 mlit of CH<sub>3</sub>OH was heated 9 hours. 7.5 g of 2-metoxypentadiene-1,3 (VI) (mixture of cis-trans form) (boiling

Card 2/6

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour : Ref Zhur - Khimiya, No. 8, 1957, 26692.

point 106.5 to 107.5°,  $n^{20}_D = 1.4555$ ,  $d_4^{20} = 0.8350$ ) and 1.5 g of dimethyl ester of pentene-2-diol-1,4 (VII) boiling point 53 to 56°/20 mm,  $n^{20}_D = 1.4250$ ,  $d_4^{20} = 0.9058$  were separated. The molar ratio of VI (forming from III) and VII (forming from IV) is about 2.5 to 1. 2.1 g of V, boiling point 120 to 121°,  $n^{20}_D = 1.4355$ ,  $d_4^{20} = 0.8654$ , was obtained by shaking 5 g of VI with 50 mlit of 5%  $H_2SO_4$ ; 2,4-dinitrophenylhydrazine, boiling point 157 to 158° (from alcohol). 58 g of A in 200 mlit of  $CH_3OH$  was hydrogenated on 20 g of powdered Ni and 25 g of  $CaCO_3$  (15°,

Card 3/6

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour : Ref Zhur - Khimiya, No. 8, 1957, 26692.

6 hours, initial pressure 70 at), the fractions (a) at 87 to 90° at normal pressure (5 g) and (b) at 63 to 66°/40 mm (28 g) were separated. At the hydrogenation of (a) on colloid Pt,  $C_5H_9CH(OCH_3)CH_2$ , boiling point 88 to 88.5°,  $n_D^{20} = 1.3485$ ,  $d_4^{20} = 0.7548$ , was

formed; (b) was hydrogenated repeatedly and after the following bromination, 1-bromo-2-metoxypentane, boiling point 63.5 to 64°/20 mm,

$n_D^{20} = 1.4509$ ,  $d_4^{20} = 1.2410$ , was obtained;

under the action of KOH in alcohol, 1-bromo-2-metoxypentane produced  $C_5H_7C(OCH_3)=CH_2$ , boiling point 89 to 90°,  $n_D^{20} = 1.4062$ ,

Card 4/6

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour.: Ref Zhur - Khimiya, No. 8, 1957, 26692.

$d_4^{20} = 0.7917$ . By a reaction between 136 g

of II (70 to 75% of the trans form) and 190 g of I in 600 mlit of  $C_2H_5OH$ , 98.7 g of a crude mixture of bromoesters (B) was produced, the major part of which was distilled at 64 to 72°/10 mm. The composition of B was investigated in the same manner as A. At the interaction of B with KOH in alcohol, 2-ethoxy-pentadiene-1,3 (VIII) (mixture of cis and trans forms), boiling point 124.5 to 125.5°,  $n_D^{20} =$

1.4490,  $d_4^{20} = 0.8244$ , and VII were received.

The hydrogenation of B resulted in  $C_3H_7CH(OC_2H_5)-CH_3$ , boiling point 105 to 106°,  $n_D^{20} = 1.3880$ ,

Card 5/6

USSR/Organic Chemistry. Synthetic Organic Chemistry. E-2

Abs Jour : Ref Zhur - Khimiya, No. 8. 1957, 26692.

$d_4^{20} = 0.7565$ , and 1-bromo-2-metoxypentane,

boiling point 58 to 59°/10 mm, which produced pentene-1 after treatment with Zn dust. Pure cis forms of VI, boiling point 105 to 105.5°,

$n_D^{20} = 1.4570$ ,  $d_4^{20} = 0.8403$ , and of VIII, boiling point 124 to 124.5°,  $n_D^{20} = 1.4530$ ,  $d_4^{20} = 0.8294$ ,

were received by the introduction of pure cis-II into the reaction with I in  $\text{CH}_3\text{OH}$  and  $\text{C}_2\text{H}_5\text{OH}$ .

Card 6/6



ZYRYANOVA, T.A.; PETROV, A.A.

Investigations in the field of conjugated systems. Part 66: The action of benzosulfodichloro- and benzosulfodibromoamide on alcohol solutions of isoprene. Zhur. ob. khim. 26 no.8:2189-2195 Ag. '56.  
(MLRA 10:11)

1. Leningradskiy Tekhnologicheskii institut imeni Lenooveta.  
(Amides) (Isoprene)

ZYRYANOVA, T.A.; PETROV, A.A.

Research in the field of conjugate systems. Part 64. Effect of benzosulfobromamide on piperylene solutions in methyl and ethyl alcohols. Zhur.ob.khim. 26 no.7:1918-1926 JI '56.

(MLRA 9:10)

1. Leningradskiy tekhnologicheskii institut imeni Lenooveta.  
(Amides) (Piperylene)

L 39715-66 EWP(j)/EWT(m)/T IJP(c) RM/WW/GD-2

ACC NR: AF6007964

(A)

SOURCE CODE: UR/0191/66/000/003/0017/0019

AUTHOR: Nikolayev, A. F.; Wan Er-Ten; Zyryanova, T. A.; Balayov, G. A.; Labedeva, E.V.; Afanas'yeva, K. S.


ORG: none

TITLE: Epoxy resins from derivatives of triphosponitrile chloride

SOURCE: Plasticheskiya massy, no. 3, 1966, 17-19

TOPIC TAGS: epoxy plastic, organic synthetic process, heat resistance, thermoplastic material

ABSTRACT: The authors studied the preparation of thermoplastics which could be made from low-molecular-weight compounds during the final preparation of an article. Hexa-glycidyl hexa-m-oxyphenylenetriphosponitrile (ES-7) was prepared by the reaction of triphosponitrile chloride with m-dihydroxybenzene in a basic medium:

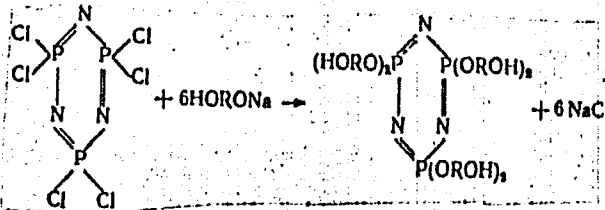

Card 1/2

UDC: 678.85


20  
18  
B

L 39715-66

ACC NR: AP6007964

2

and a subsequent reaction with epichlorohydrine. The reaction was performed either heterogeneously in toluene or xylene or homogeneously in an absolute ethanol-toluene mixture. Maleic anhydride (40%) was used successfully as the hardening agent, but the plastic produced had a low thermal stability. Hardening at 180C for 15-20 hr without any hardening agent produced thermoplastics resisting temperatures of 190-230C, having a 350-400 kg/cm<sup>2</sup> and 25-30 kg/mm<sup>2</sup> stability of adhesion-to-metal band and Vickers hardness, respectively. ES-7 did not burn when exposed to 100-1100C for 20 sec.

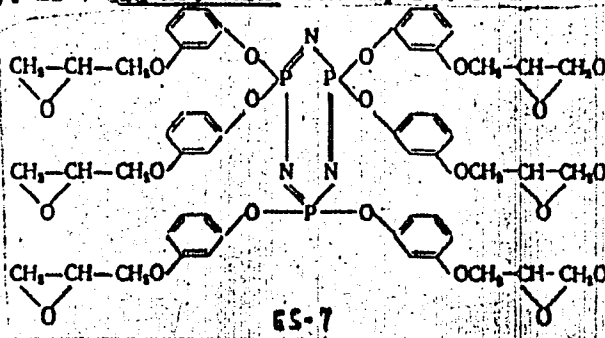

Orig. art. has: 6 fig.

SUB CODE:07,11/SUBM DATE: none/ ORIG REF: 003

Card 2/2 9d

ZYRYANOVA, T. A.

ZYRYANOVA, T. A.--"The Effect of Benzosulfodichloramide and Benzosulfodibromamide on Solutions of Piperylene and Isoprene in Methyl and Ethyl Alcohol." Min Higher Education USSR. Leningrad Order of Labor Red Banner Technological Inst imeni Leningrad Soviet. Leningrad, 1955. (Dissertation for the Degree of Candidate in Chemical Science).

SO. Knizhnaya letopis'  
No 2, 1956.

L 43766-66 EWT(m)/T/EWP(j) IIP(c) WW/RM SOURCE CODE: UR/0413/66/000/015/0088/0088  
(A)

ACC NR: AP6029919

INVENTOR: Nikolayev, A. F.; Zyryanova, T. A.; Balayev, G. A.; Voronova, N. A.; Grigor'yeva, G. M.

41  
B

ORG: none

TITLE: Preparative method for phosphorus-containing epoxy resins. Class 39, No. 184443 (announced by the Leningrad Technological Institute im. Lensovet (Leningradskiy tekhnologicheskii institut))

SOURCE: Izobret prom obraz tov zn, no. 15, 1966, 88

TOPIC TAGS: fire resistant material, epoxy plastic

ABSTRACT: An Author Certificate has been issued for a preparative method for phosphorus-containing epoxy resins based on phosphonitrile chloride oligomers and epoxy compounds in the presence of caustic soda. To improve the fire resistance of the resins and to simplify the method, the phosphonitrile chloride oligomers are condensed with glycidol. [SM]

SUB CODE: 11/ SUBM DATE: 09Jul64/ ATB PRESS 5268

UDC: 678.64'42 678.85

Card 1/1 297

ZYRYANOVA, V. G., CAND MED SCI, "ON THE REACTIVITY OF TISSUE  
~~SUMMARY~~ <sup>and</sup> ELEMENTS OF THE SKIN IN THE FOCUS OF ASEPTIC INFLAMMA-  
TION ~~WHEN TREATED WITH~~ <sup>under the effect of</sup> MUD FROM THE EBeyTA AND UL'DZHAY LAKES  
OF UMSKAYA OBLAST. [EXPERIMENTAL HISTOLOGICAL <sup>study</sup> INVESTIGATION ON  
WHITE RATS]." NOVOSIBIRSK, 1961. (NOVOSIBIRSK STATE MED INST).  
(KL-DV, 11-61, 227).

-249-

KLYAROVSKIY, V.M.; GUSEV, G.M.; ARKHIPENKO, D.K.; GOLSOV, S.I.;  
ZYRYANOVA, Ye.M.

Practice in modeling the weathering process of micas. [Trudy]  
Inst. geol. i geofiz. Sib. otd. AN SSSR no.32:63-74 '65.  
(MIRA 18:9)



CA

Generator mixer. S. S. Kutateladze and V. A. Zysid  
 Russ. 55,977, Oct. 31, 1939. Construction details.

ASME-ISA METALLURGICAL LITERATURE CLASSIFICATION

OPEN  
 COMMON ELEMENTS  
 MATERIALS INDEX  
 SUBJECT INDEX  
 AUTHOR INDEX  
 SUBJECT INDEX

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

ZYSIN, V.A., kandidat tekhnicheskikh nauk.

Efficient turbine units for heating and power plants. Vest.mash. 33 no.11:  
10-16 N '53. (MLBA 6:12)  
(Turbines)

ZYSIN, V.A., dotsent

~~SECRET~~  
Graphic and analytic method for calculating one-dimensional flows  
of a compressible fluid. Trudy LPI no.2:200-214 '54. (MLRA 8:8)  
(Aerodynamics) (Turbomachines)

- Y-1N, - 1 -

AID P - 1327

Subject : USSR/Engineering

Card 1/1 Pub. 110-a -- 9/19

Authors : Zysin, V. A., Zysina-Molozhen, L. M., Kand. of Tech. Sci.,  
Polyakov, K. S. and Shapiro, I. G., Engineers

Title : Interferometrical study of a flow around turbine bladings  
at trans-and supersonic speed

Periodical : Teploenergetika, 2, 38-42, F 1955

Abstract : The results of interferometrical studies are outlined con-  
cerning the flow at trans- and supersonic speed around  
turbine bladings at different values of the inflow angle  
and of the pitch. Based on experimental data of a two-  
dimensional flow some considerations are presented rela-  
tive to the most favorable parameters of the bladings  
analyzed from the point of view of blade losses. Photos,  
charts, 2 Russian references (1953-1954).

Institution : Central Scientific Research Institute of Boilers and  
Turbines

Submitted : No date

LEVIN, Mark Iosifovich,; ZYSIN, V.A., dotsent, nauchnyy redaktor; DZHAIABEKOVA,  
L.A., otvetstvennyy redaktor; SUSLENIKOVA, N.M., tekhnichskiy redaktor.

[Motors; from the water wheel to the atomic engine] Mashina-dvigatel';  
ot vodianogo koleasa do atomnogo dvigatelia. Leningrad, Gos.isd-vo  
detskoi lit-ry M-va prosv.RSFSR, 1957. 222 p. [Microfilm]

(MIRA 10:4)

(Motors)

ZYSIN, V.A.; MIKHAYLOV, P.M.

Efficient operation of the gas-turbine unit in a thermal network.  
Nauch.-tekh. inform. biul. LPI no.10:3-7 '58. (MIRA 14:3)  
(Electric power plants)  
(Gas turbines)

ZYSIN, V. A.

p. 3

PHASE I BOOK EXPLOITATION SOV/3909

Leningrad. Politeknicheskii institut

Energomashinostroyeniye (Power-Machinery Construction) Moscow,  
Mashgiz, 1960. 163 p. (Series: Its: Trudy, No. 204) Errata  
slip inserted. 1,600 copies printed.

Sponsoring Agency: RSFSR. Ministerstvo vysshego i srednego spetsial'-  
nogo obrazovaniya.

Resp. Ed.: V.S. Smirnov, Doctor of Technical Sciences, Professor;  
Ed.: V.I. Bulanin, Candidate of Technical Sciences, Docent; Tech.  
Ed.: P.S. Frumkin; Managing Ed. for Literature on the Design and  
Operation of Machinery (Leningrad Division, Mashgiz): F.I. Feti-  
sov, Engineer.

PURPOSE: This book is intended for workers at scientific research  
institutes and factory design offices. It may also be useful to  
students of advanced courses and aspirants specializing in  
power-machinery construction.

Card 1/5

SOV/3909

Power-Machinery Construction

COVERAGE: This collection of 17 articles deals with analyses of gas-turbine installations and theoretical and experimental investigations of the operation of power and transportation machinery, including turbines, compressors, and internal-combustion engines. A description is given of recent theoretical and experimental investigations undertaken by the Department of Power-Machinery Construction, Leningradskiy politekhnicheskii institut (Leningrad Polytechnical Institute). The investigations include analyses of parameters for insuring high economy of operation and the perfecting of methods of calculating and designing new power equipment. References follow several of the articles.

TABLE OF CONTENTS:

Preface

3

1. Strakhovich, K.I. Approximate Method for Calculating the Velocity Distribution at the Inlet and Outlet of a Rotor in an Axial Compressor

5

Card 2/5



Power-Machinery Construction

SOV/3909

2. Seleznev, K.P. On the Flow of an Ideal Gas in a Bladeless Diffuser of a Centrifugal Compressor 24
3. Zysin, V.A. Binary Gas- and Steam-Turbine Systems 29
4. Kalinin, V.F. Fundamental Characteristics of Heat Exchangers for Closed-Type Helium-Driven Turbines 37
5. Bulanin, V.I. Some Features of One Type of Gas-Turbine System 43
6. Arsen'yev, L.V. Calculation of Transition Processes in Gas-Turbine Engines 61
7. Seleznev, K.P. On the Question of Similarity of Temperature Fields in Turbomachinery Elements 67
8. Dmitrevskiy, V.A. On the Determination of the Boundaries of the Operating Regime in Shaftless Diesel-Engine Compressors 77

Card 3/5

30238

S/145/60/000/002/006/020  
D221/D302

26.3220

AUTHOR: Zysin, V.A., Candidate of Technical Sciences  
TITLE: Power characteristics of gas turbine installation  
operating with the addition of steam  
PERIODICAL: Izvestiya vysshikh uchebnykh zavedeniy. Mashino-  
stroyeniye, no. 2, 1960, 59 - 65

TEXT: There are two mixed thermal units utilizing both gas and steam: one uses products of combustion in steam installations, the other has a direct steam intake for gas turbines. This combination should be regarded as a method of improving power characteristics of conventional gas turbines, and was investigated by the Leningradskiy politekhnicheskii institut (Leningrad Polytechnic Institute) in connection with high power two-shaft ship gas turbines. Calculations indicated that injection of water in the gas flow increases maximum power by 20 %, without modifying dimensions of turbine or compressors. The amount of water should not exceed 4-5 % of the weight of gas intake. In simple installations it requires

Card 1/85

Power characteristics of gas ...

30238  
S/145/60/000/002/006/020  
D221/D302

the addition of a water pump only. It is assumed that the evaporated water forms a homogeneous mixture with the gas. In turbines the downstream maintains its superheated condition at relatively low partial pressure, and, therefore, it is possible to consider the mixture as following the laws of ideal gases. The T-S diagram of Fig. 2 illustrates cycle 1-2-3-4-1 of gas working medium, and curve 5-6-7-8-9-10-5 which corresponds to the Rankin cycle of steam as a working medium. The total coefficient of efficiency without regeneration is given by

$$\eta = \frac{Q_1'}{Q_1} \eta' + \frac{Q_1''}{Q_1} \eta'' \quad (1)$$

where  $Q_1''$  is the heat required for increase of enthalpy of steam,  $Q_1'$  is the heat produced by products of combustion, and  $Q_1' = Q_1 - Q_1''$  is the heat used in the gas cycle,  $\eta'$  and  $\eta''$  are efficiency coefficients in gas and Rankin cycles. In the case of regeneration,

Card 2/65

30238

S/145/60/000/002/006/020  
D221/D302

Power characteristics of gas ...

$$\eta = \frac{Q_1' - Q_{reg}^I}{Q_1} \eta' + \frac{Q_1'' - Q_{reg}''}{Q_1} \quad (11)$$

is used, where  $Q_{reg}^I$  and  $Q_{reg}''$  are the amounts of heat that are transferred to air and steam in the regenerators. The maximum specific work capacity of a combined gas-steam cycle is 2.6 times greater than in a gas cycle. Due to limiting factors mixed operation of a gas turbine allows a two-fold increase only. Higher initial temperature of gas as well as regeneration and afterburning result in approximately equal advantages for straight and combined operation of a gas turbine. Another method consists in realizing the after-burning and water evaporation by heat of exhaust, instead of in the gas stream in the turbine, as shown in Fig. 4. Gas and steam mixture from turbine GST is fed into boiler-utilizator BU, operating at a pressure close to that of combustion chamber CC. Steam produced is directed into the gas stream and is mixed combustion products in turbine upstream. After giving an equation for defining the amount of water evaporated by a kg of dry gas, the

Card 3/85

30238

S/145/60/000/002/006/020  
D221/D302

Power characteristics of gas ...

coefficient of efficiency of the cycle is presented in

$$\eta = \frac{A_1' + gh''}{c_p'(t_1 - t_4) + g c_p''(t_1 - t_s)} \quad (4)$$

where  $c_p'$  and  $c_p''$  are average specific heats of gas and steam,  $h''$  is the temperature drop in steam; of the turbine;  $A_1'$  is the specific work of the gas cycle;  $t_1$  is the temperature of mixture in fore-part of the turbine;  $t_4$  is the air temperature in the downstream of compressor;  $t_s$  is the temperature in the aft of boiler. Calculations revealed that the efficiency of this arrangement is close to that of a similar gas turbine with a degree of regeneration, equal to  $\mu = 0.75$ . Superheated steam together with preheated feed water improve the arrangement. The boiler-utilizator has the advantage of being convertible to generate general purpose steam without an additional outlay, and its water consumption is smaller than in intermediate coolers of conventional gas turbines. Graphs of the relative air flow as well as the corresponding coefficient of effi-

Card 4/85

30230

Power characteristics of gas ...

S/145/60/000/002/006/020  
D221/D302

ciency for this installation are given. The generation of steam in the boiler-utilizator of practically saltless steam provides a possibility of using the latter as a medium for cooling the turbine. There are 8 figures.

ASSOCIATION: Leningradskiy politekhnicheskii institut im. I.M. Kalinina (Leningrad Polytechnic Institute im. M.I. Kalinin)

SUBMITTED: December 15, 1959

Card 5/15

87773

S/114/61/000/001/005/009  
E194/E355

26.2124

AUTHORS: Zysin, V.A., Candidate of Technical Sciences and  
Davydov, V.S., Engineer

TITLE: External Steam and Evaporative Cooling of Gas-  
turbine Blades

PERIODICAL: Energomashinostroyeniye, 1961, No. 1,  
pp. 28 - 30

TEXT: Cooling of gas-turbine blades through internal ducts  
raises great constructional difficulties. Moreover, it is  
very difficult to get the heat away from the blade edges in  
this way. External methods of cooling gas-turbine blades do  
not have these defects. A long time ago Stodola considered  
the possibility of having gas nozzles flanked by nozzles  
delivering cooling air. However, the power losses were very  
high. The prospects of external cooling would be much  
improved if a flow containing suspended drops of water could  
be used as the cooling agent. American work has described  
the injection of water into the gas duct, though in this case  
the medium cooling the blade was steam formed by the evaporation  
Card 1/8

S/114/61/000/001/005/009<sup>87773</sup>  
E194/E355

External Steam and Evaporative Cooling of Gas-turbine Blades  
of suspended water in the boundary layer. The unavoidable evaporation of some of the drops outside the boundary layer has some adverse influence on the cooling effect and reduces the efficiency of the cycle. ✓

Additional possibilities of using moistened flows for external cooling are provided in combined steam gas sets in which power is drawn not only from the gas but to a certain extent from steam. It is assumed that the steam is generated by using exhaust heat. In this case steam is delivered to the gas duct at a pressure close to that in the combustion chamber and there is combined expansion of gas and steam in the single gas-steam turbine. Under such conditions all or part of the steam could be applied directly to the blades without mixing with the hot gases. A possible version of such a scheme uses a waste-heat boiler on the turbine exhaust to raise steam which is delivered to the turbine along with the gas from the combustion chamber. The gas and steam are delivered to the turbine through separate groups of nozzles.

Card 2/8



87773

S/114/61/000/001/005/009  
E194/E355

External Steam and Evaporative Cooling of Gas-turbine Blades

It may be assumed that with a small number of stages the steam and gas flows can be kept reasonably separate in the turbine. However, this is not possible in turbines with many stages where the steam and gas will mix fully. The combined ideal cycle corresponding to this case is described and discussed. This scheme is claimed to have several advantages over those in which water is injected directly into the gas duct. The water formed during the expansion of saturated steam in the turbine will contain practically no salts that might form deposits in the turbine. Eq. (3) is then derived for the ratio of the temperature difference between the gas and the blade to that between the steam and the blade. By making calculations on several variants of the proposed steam/gas turbine circuit it was found that the blades of the first ring could be cooled by 50-80 °C. In practice, there would be additional losses due to the different values of relative rates of flow of gas and steam in the working blades. In single-stage turbines these

Card 3/8

X

S/114/61/000/001/005/009  
E194/E355

67773

External Steam and Evaporative Cooling of Gas-turbine Blades

losses may be avoided by appropriately increasing the pressure in the waste-heat boiler relative to the pressure in the combustion chamber. A variant of blade cooling is then suggested in which the blades have "two storeys" with steam flowing through the parts of the blade nearer to the shaft to keep it and the blade roots cool, and gas flowing through the parts of the blade further away from the shaft. Here, the cooling action of dry steam is quite sufficient since the process of cooling of the runner blades is limited by the thermal conductivity. For schemes with partial delivery of steam and gas to the turbine the above mentioned reduction of blade temperature by 50 - 80 °C may be insufficient considering the decrease in turbine efficiency. In this case the improvement of heat exchange by wetting the steam flow becomes of particular importance. The calculation of cooling processes with external flow, over the blades, of dry steam can obviously be based on the usual procedure used for gas flows. Data of

Card 4/8

87773

S/114/61/000/001/005/009  
E194/E355

External Steam and Evaporative Cooling of Gas-turbine Blades  
heat exchange in a wet steam flow are not available.  
Concerning cooling by water injection into a gas flow, the  
only published data indicate the possibility of achieving  
blade temperature reductions of 300 - 400 °C but there is  
no justification for extending these results to other  
conditions. The only experimental work on heat transfer  
with two-phase flow over a cylindrical tube was carried out  
by R.Z. Alimov but his test conditions were so unrelated  
to the cooling of turbine blades by suspended water as to be  
difficult to use.

A systematic investigation of heat exchange in application to  
the problem of external cooling of blades by suspended  
moisture would apparently involve tests in the following  
sequence: study the influence of suspended water on heat  
exchange of a compressible flow over the outside of a single  
body; make experiments on blade profiles under static  
conditions and proceed to tests on rotating machines.

Card 5/8

67773

S/114/61/000/001/005/009  
E194/E355

External Steam and Evaporative Cooling of Gas-turbine Blades

Some results are then given of heat-transfer investigations during the flow over a single cylinder of a compressible two-phase substance. The data for cooling of this single cylinder are conveniently compared with available data for single-phase flows. Moreover, existing experimental material can indicate the rate of cooling of the leading edge of the turbine blades. X

Investigations of heat exchange during flow over a single cylinder were carried out with equipment illustrated schematically in Fig. 4. The rod was installed directly in front of the nozzle and heated electrically. Moisture was injected into the flow through a nozzle. Measurements were made of the flow of dry steam or air and of the water injected through the nozzle, and of the necessary temperatures, pressures and head at the nozzle. Tests were first made with superheated steam and dry air and a relationship between the Nusselt and Reynolds numbers was constructed. Agreement with

Card 6/8

87773

S/114/61/000/001/005/009  
E194/E355

External Steam and Evaporative Cooling of Gas-turbine Blades

the work of previous authors was found to be good. Then the flow was moistened and further tests were made. Some of the results are plotted in Fig. 5 and the indications are that a temperature reduction of 230 - 450 °C might be expected. A number of tests were made when the steam delivered to the nozzle was dry saturated. In such cases the isentropic expansion corresponded to a moisture droplet content at the nozzle of 3 - 7%. However, the character of the heat exchange was no different from that in a flow of dry slightly superheated steam. There is thus reason to suppose that all the moisture is apparently evaporated during retardation in the boundary layer. It is concluded that external cooling of the gas-turbine blades can be effective, particularly at the leading edges of the blades, without great structural difficulties. In addition to water injection into the gas flow, use may be made of various systems of steam cooling associated with steam

Card 7/8

87773

S/114/61/000/001/005/009

E194/E355

External Steam and Evaporative Cooling of Gas-turbine Blades generation in combined steam gas schemes. The steam cooling system with "two-storey" blades requires no moistening of the cooling steam.

There are 5 figures and 10 references: 6 Soviet and 4 non-Soviet.

Card 8/8

MIKHAYLOVSKIY, Georgiy Andreyevich; ZYSIN, V.A., kand. tekhn. nauk,  
retsenzent; ARNOL'D, L.V., prof., red.; MITARCHUK, G.A., red.  
izd-va; POL'SKAYA, R., tekhn. red.

[Thermodynamic analysis of processes in steam-gas mixtures]  
Termodinamicheskie raschety protsessov parogasovykh smesei.  
Moskva, Mashgiz, 1962. 183 p. (MIRA 15:6)  
(Thermodynamics)

PALEYEV, I.I., prof.; STRAKHOVICH, K.I., prof.; AGAFONOV, Ye.A., dotsent;  
ZYSIN, V.A., dotsent

"Principles of the theory of heat transfer" by V.S. Zhukovskii.  
Reviewed by I.I. Paleev and others. Izv. vys. ucheb. zav.; enrg. 5  
no.6:128-129 Je '62. (MIRA 15:6)

1. Leningradskiy politekhnicheskii institut im. M.I.Kalinina.  
(Heat-Transmission) (Thermodynamics)  
(Zhukovskii, V.S.)



ZYSIN, V.A., kand. tekhn. nauk; ZAYTSEV, S.S., inzh.; FLATONOVA, S.G., inzh.;  
ERMIKH, V.A., inzh.

Construction of an ejector system for a large furnace with a  
shaft-type impact mill. Teploenergetika 11 no.9:42-44, S '64,  
(MIRA 18:8)

1. Leningradskiy politekhnicheskij institut imeni M.I.Kalinina.

ZYSIN, V.A., doktor tekhnicheskikh nauk; DAVYDOV, V.O., inzh.

Heat emission of a flow about a cascade of blades carrying suspended  
molecules. Energiya i transport 11 no.8:44-47, 1966.

(MIRA 18:10)

L 47466-66 EWP(m)/EWP(w)/EWP(v)/T-2/EWP(k)/EWP(f) IJP(c) WW/FM

ACC NR: AP6029070

SOURCE CODE: UR/0413/66/000/014/0124/0124

INVENTOR: Kirillov, I. I.; Zysin, V. A.; Osherov, S. Ya.; Arsen'yev, L. V.

74  
B

ORG: none

TITLE: High temperature steam-gas double-flow turbine. Class 46, No. 184070  
[announced by the Leningrad Polytechnical Institute im. M. I. Kalinin  
(Leningradskiy politekhnicheskiy institut)]

SOURCE: Izobret prom obraz tov zn, no. 14, 1966, 124

TOPIC TAGS: steam gas turbine, double flow turbine, blade cooling, cooled blade,  
gas turbine, turbine, turbine blade

ABSTRACT: The proposed high temperature steam-gas double-flow turbine consists of a  
housing containing a centripetal rotor wheel equipped with hollow, cooled blades with  
separate flow of channels for the wet (or superheated) steam and the gas. In order  
to ensure a maximum temperature gradient in the high temperature range, and to  
simplify the design, the blades are made of two parts, forming inlet slots for

Card 1/2

ACC NR: A27009592

SOURCE CODE: UR/0096/67/000/001/0044/0047

AUTHOR: Kirillov, I. I. (Doctor of technical sciences); Zysin, V. A. (Doctor of technical sciences); Osharov, S. Ya. (Candidate of technical sciences); Arsen'yev, L. V. (Candidate of technical sciences); Petrov, Yu. Ye. (Engineer)

ORG: none

TITLE: Selection of optimal parameters for a high temperature steam-gas installation using a plan developed by the central boiler-turbine scientific research institute and the Leningrad Polytechnical Institute

SOURCE: Teplo energetika, no. 1, 1967, 44-47

TOPIC TAGS: thermoelectric power plant, steam turbine, gas turbine, heating engineering, cooling, engine cooling system

SUB CODE: 21,10,13

ABSTRACT: The specific features of a method of calculating the parameters of a steam-gas installation are presented and some results of calculation are outlined. In its simplest variant, the steam-gas installation described provides for attainment of an efficiency of approximately 50% with a gas temperature of 1200°C. The optimal degree of gas pressure increase is 9, which considerably facilitates the problems of cooling the high temperature gas turbine and designing turbine machinery. The efficiency of the dual installation depends very little on the steam parameters. High efficiency values can be produced at a steam temperature of 540°C. With increasing initial gas temperature, the thermal effectiveness of the installation increases. In its simplest variant, the efficiency of the installation reaches 55-56% at a

Card 1/2

UDC: 621.433.621.185.001.24

0930 11.30

ACC NR: AP7009592

temperature of 1500°C. The introduction of intermediate heating of the gas provides a further increase in efficiency. Orig. art. has: 7 figures, 2 formulas and 2 tables. JPRS: 40,102

Card 2/2

TRUSHLYAKOV, V.P.; BEREZHINSKIY, A.I.; SPIVAK, M.Ya.; FINOGEYEV, I.A.;  
LIPETS, A.U.; AYZEN, B.G.; KOSTOVETSKIY, D.L.; BOLDZHI, K.I.;  
YAMPOL'SKIY, S.L.; FEDOTOV, D.K.; KIRILLOV, I.I.; OSHEROV, S.Ya.;  
ZYSIN, V.A.; OGLOBLIN, G.A.; KANAYEV, A.A.; BULEGA, S.S.;  
BORUKHMAN, V.A.; IOEL'SON, V.I.

Inventions. Energ. i elektrotekh. prom. no.3:48-49 JI-S '64.  
(MIRA 17:11)

KIRILLOV, I. I., doktor tekhn. nauk, prof.; ZYSIN, V. A., kand. tekhn. nauk; OSHEROV, S. Ya., kand. tekhn. nauk

Problem concerning the cooling of a high-temperature gas turbine. *Energomashinostroenie* 8 no.12:7-10 D '62.  
(MIRA 16:1)

(Gas turbines--Cooling)

ZYSIN, V.A.

Calculation of the varying conditions of flow about the cascade  
profiles. Trudy LPI no.221:103-109 '62. (MIRA 15:9)  
(Turbines)



ZYSIN, V.A.

Highly maneuverable turbine systems. Trudy LPI no.221:110-118  
'62. (MIRA 15:9)

(Interconnected electric utility systems)  
(Gas turbines) (Electric power production)

ZYSIN, Vladimir Aronovich; KIRILLOV, I.I., prof., retsazent;  
ERLIKH, V.A., inzh., red.; SOBOLEVA, Ye.M., tekhn. red.

[Composite steam-gas systems and their operating cycles]  
Kombinirovannye parogazovye ustanovki i tsikly. Moskva,  
Gosenergoizdat, 1962. 185 p. (MIRA 16:5)  
(Thermodynamics) (Electric power plants)  
(Heat—Transmission)

117 AND 126 CODES

PROCESSES AND PROPERTIES INDEX

117 AND 126 CODES

CA

3

Theory of nuclear fission. Ya. B. Zel'dovich and Ya. A. Zysin. *J. Exptl. Theoret. Phys. (U. S. S. R.)* 10, 831-4 (1940). -- Theoretical-mathematical. The disintegration to two similar nuclei is discussed. P. H. Rathmann

BERNARD LEWIS

ASME-SLA METALLURGICAL LITERATURE CLASSIFICATION

GROUP

117 AND 126 CODES

117 AND 126 CODES

SOV/89-5-4-9/24

AUTHORS: Antropov, G. P., Zysin, Yu. A., Kovrizhnykh, A. A., Lbov, A. A.

TITLE: Reaction Cross Section  $U^{238}(n,2n)U^{237}$  With Neutrons of an Energy of 15 MeV (Secheniye reaktsii  $U^{238}(n,2n)U^{237}$  na neytronakh s energiyey 15 Mev)

PERIODICAL: Atomnaya energiya, 1958, Vol 5, Nr 4, pp 456-457 (USSR)

ABSTRACT: In 1952  $\sigma$  was measured by the authors for  $U^{238}(n,2n)U^{237}$  for  $E_n = 15$  MeV as amounting to  $1,5 \pm 0,2$  b. As, in the meantime, new values have been published which are in contradiction to those mentioned, measurement was repeated in 1957. A  $4\pi$ -counter was used for measuring. The value  $\sigma_{n,2n}$  was measured from the activity of  $U^{237}$  and from the fission products of  $U^{238}$ , namely  $Mo^{99}$ ,  $Ba^{140}$ ,  $Ce^{141}$ . A value of  $0,90 \pm 0,15$  b was obtained by these measurements. This is in agreement with the value given in reference 1, but in strict contradiction of the value given in reference 2. Comparison with the results given in reference 4 leads to the conclusion that the value of 0,90 b is highly probable.

Card 1/2

Reaction Cross Section  $U^{238}(n,2n)U^{237}$  With Neutrons of an Energy of 15 MeV

SOV/89-5-4-9/24

N. P. Martynov, T. P. Timofeyeva, and N. V. Shuvanova participated in the work of chemical preparation. There are 4 references, 2 of which are Soviet.

SUBMITTED: April 17, 1958

Card 2/2

21(7)

AUTHORS:

Lebedev, P. P., Zysin, Yu. A., Klintsov, Yu. S.,  
Stsiborskiy, B. D. SOV/89-5-5-2/27

TITLE:

The Neutron Yield From Inelastic Interaction of Neutrons of  
14 MeV Energy With Nuclei and the Reaction Cross Sections  
(n,2n) (Vykhod neytronov pri neuprugom vzaimodeystvii ney-  
tronov s energiyey 14 Mev s yadrami i socheniye reaksii  
(n,2n))

PERIODICAL:

Atomnaya energiya, 1958, Vol 5, Nr 5, pp 522-525 (US3R)

ABSTRACT:

The quantities  $\eta_a$  and  $\sigma_{in}$  were measured for 10 nuclei  
(natural isotope-composition).  $\eta_a$  is the number of neutrons  
produced by inelastic scattering of neutrons with a nucleus.  
The relative variation of the entire neutron flux and the  
weakening of the primary neutron flux after passage through  
the target is determined. Measurements were carried out in  
spherical geometry. The neutron source was located in the  
center.

Card 1/4

The relative weakening of the primary neutron flux was measured

The Neutron Yield From Inelastic Interaction of Neutrons of 14 MeV Energy  
 With Nuclei and the Reaction Cross Sections (n,2n) SOV/89-5-5-2/27

by means of a copper indicator  $[Cu^{63}(n,2n)Cu^{62}]$ . The relative variation of the total neutron flux was measured by means of a boron counting-tube in the paraffin block, which is described (Ref 2).  
 Measuring errors could not be kept below an average of  $\pm 2\%$ . The values for  $\sigma_{in}$  agree with previously obtained results. The values  $\eta_a$  are higher by 10-15% than those mentioned by reference 1. In a similar manner the values  $(\sigma_{n,2n} - \sigma_c)$  differ in the same direction as  $\eta_a$  from the values mentioned (Ref 1). The following measuring results were obtained:

Element	$\eta$	$\sigma_{in}, b$	$(\sigma_{n,2n} - \sigma_c), b$
Fe	1,20 $\pm$ 0,15	1,44 $\pm$ 0,04	0,26 $\pm$ 0,1
Cu	1,34 $\pm$ 0,15	1,50 $\pm$ 0,07	0,47 $\pm$ 0,1
Mo	1,64 $\pm$ 0,2	1,60 $\pm$ 0,15	1,0 $\pm$ 0,2

Card 2/4

The Neutron Yield From Inelastic Interaction of Neutrons of 14 MeV Energy  
 With Nuclei and the Reaction Cross Sections (n,2n) SOV/89-5-5-2/27

Element	$\eta$	$\sigma_{in}, b$	$(\sigma_{n,2n} - \sigma_c), b$
Cd	1,74 $\pm$ 0,2	1,87 $\pm$ 0,2	1,38 $\pm$ 0,3
Sn	1,81 $\pm$ 0,2	1,83 $\pm$ 0,2	1,48 $\pm$ 0,3
Sb	1,82 $\pm$ 0,2	1,85 $\pm$ 0,13	1,52 $\pm$ 0,2
Hg	1,86 $\pm$ 0,2	2,46 $\pm$ 0,1	2,02 $\pm$ 0,2
Pb	1,92 $\pm$ 0,2	2,46 $\pm$ 0,1	2,18 $\pm$ 0,2
Bi	1,88 $\pm$ 0,2	2,58 $\pm$ 0,1	2,18 $\pm$ 0,2
U	2,8 $\pm$ 0,25	2,91 $\pm$ 0,14	-

A. A. Malinkin took part in the experiments. There are 1 figure, 1 table, and 10 references, 2 of which are Soviet.

SUBMITTED:  
 Card 3/4

April 17, 1958



VLASOV, V.A.; ZYSIN, Yu.A.; KIRIN, I.S.; LBOV, A.A.; OSEYAYEVA,  
L.I.; SEL'CHENKOV, L.I.

[Yield of certain fragments in  $\text{Th}^{232}$  fission by 14.3 Mev.  
neutrons] Vykhody nekotorykh oskolkov pri delenii  $\text{Th}^{232}$   
neitronami s energiei 14,3 mev. Moskva, Glav. upr. po is-  
pol'zovaniyu atomnoi energii pri Sovete Ministrov SSSR,  
1960. 11 p. (MIRA 1714)

S/089/60/008/04/05/009  
B113/B017

AUTHORS: Zysin, Yu. A., Kovrizhnykh, A. A., Lvov, A. A.,  
Sel'chenkov, L. I.

TITLE: Cross Section of the Reaction  $Th^{232}(n, 2n)Th^{231}$  With  
Neutrons of the Energy 14.7 Mev

PERIODICAL: Atomnaya energiya, 1960, Vol. 8, No. 4, pp. 360-361

TEXT: The cross section was determined by a method which is based on the activity of  $Th^{231}$  and the fission fragments  $Mo^{99}$  and  $Ba^{140}$ . The method has been described in a paper by G. P. Antropov et al. in Atomnaya energiya, 1958, Vol. 5, No. 4, p. 456. 14.7-Mev-neutrons were obtained by means of a low-voltage linear accelerator from the reaction  $D(T,n)He^4$ . Mixture irradiated:  $Th(NO_3)_4 \cdot 4 H_2O, U_3O_8$ . Six irradiations were made, the irradiation lasting from three to eleven hours, the total neutron emission of the individual samples was at  $(2 \pm 6) \cdot 10^{14}$  n. According to a

Card 1/2

✓ B

Cross Section of the Reaction  $\text{Th}^{232}(n, 2n) \text{Th}^{231}$   
With Neutrons of the Energy 14.7 Mev

S/089/60/008/04/05/009  
B113/B017

formula given, the reaction cross section of  $\text{Th}^{232}(n, 2n) \text{Th}^{231}$  with  
14.7-Mev-neutrons is found to be  $\sigma_{n,2n}^{\text{Th}} = (0.65 \pm 0.15)$  barn. The authors  
thank K. A. Vlasov, A. S. Kovaldov, V. M. Lartsev, V. R. Nagina,  
N. D. Osvayev for their assistance.

SUBMITTED: October 21, 1959

✓B

Card 2/2

32988

S/641/61/000/000/015/033  
B104/B102

24.6600

## AUTHORS:

Vlasov, V. A., Zysin, Yu. A., Kirin, I. S., Lbov, A. A.,  
Osyayeva, L. I., Sel'chenkov, L. I.

## TITLE:

Yields of some fragments in  $\text{Th}^{232}$  fission by 14.3 Mev neutrons

## SOURCE:

Krupchitskiy, P. A., ed. Neytronnaya fizika; sbornik statey.  
Moscow, 1961, 235-240

TEXT: The yields of  $\text{Ga}^{73}$ ,  $\text{Br}^{83}$ ,  $\text{Sr}^{89}$ ,  $\text{Y}^{91}$ ,  $\text{Zr}^{95}$ ,  $\text{Mo}^{99}$ ,  $\text{Ag}^{111}$ ,  $\text{Cd}^{115}$ ,  $\text{Te}^{129m}$ ,  $\text{Te}^{132}$ , and  $\text{Ce}^{141}$  fragments produced in  $\text{Th}^{232}$  fission were studied by radiochemical methods. The 14.3 Mev neutrons were obtained from  $\text{D}(\text{T},\text{n})\text{He}^4$  reactions, the deuterons of  $\sim 150$  kev were obtained from a low-voltage linear accelerator. The specimens were irradiated with a neutron flux of approximately  $(0.7-2) \cdot 10^8$  neutr/cm<sup>2</sup>·sec for 5-25 hr. The hermetically sealed cylindrical containers contained up to 90 g  $\text{Th}(\text{NO}_3)_4 \cdot 4\text{H}_2\text{O}$ . The irradiated thorium nitrate was dissolved in water. From this solution the fission fragments were isolated by four different methods and identified by measuring their  $\beta$ -activity. The absolute fragment yield was determined

Card 1/2

32988

S/641/61/000/000/015/033  
B104/B102

Yields of some fragments in ...

by a method in which the sum of the relative yields of all fission fragments obtained by interpolation of their mass distribution curves was equated to 200%. In this case triple fissions are assumed to be negligible. The results are summarized in Table 2. A comparison with the results obtained by A. Turkevich (Phys. Rev., 84, 52 (1951); Phys. Rev., 89, 552 (1953)) shows that with increasing neutron energy the fragment yields in symmetrical fission increase. The authors thank K. N. Borozdina, A. S. Kovaldov, V. M. Lartsev, N. D. Osyayev, E. V. Plyusnina and R. N. Sorokina for their help with these studies. There are 1 figure, 3 tables, and 10 references: 3 Soviet and 7 non-Soviet. The four most recent references to English-language publications read as follows: Katcoff S., Nucleonics, 16, 4, 78 (1958); Steinberg E. P., Glendenin L. E., report no. 614, held at the First International Conference on the Peaceful Uses of Atomic Energy, Geneva, 1958; Strominger D., Hollander J. M., Seaborg G. T., Rev. Mod. Phys., 30, 585 (1958); Leachman R., report no. 2467, held at the Second International Conference on the Peaceful Uses of Atomic Energy, Geneva, 1958. ✓

Table 2. Fragment yields in 14.3-Mev neutron induced  $Th^{232}$  fission.  
 Legend: (1) isotope measured, (2) relative yield, (3) absolute yield, in %

Card 2/2

ANTROPOV, G.P.; ZYSIN, Yu.A.; KOVRIZHNYKH, A.A.; TSAREV, V.P.

Fast neutron spectrometer. Prib. i tekhn. eksp. 6 no. 4:30-33

Jl-Ag '61.

(Spectrometer)

(MIRA 14:9)

SKLIZKOV, G.V.; PAVLOVSKIY, A.I.; ZYSIN, Yu.A.

Discharge device for precise commutation of power pulses. Prib. i  
tekh. eksp. 6 no. 5:89-91 S-0 '61. (MIRA 14:10)  
(Pulse techniques (Electronics))

AM4027870

BOOK EXPLOITATION

S/

Zy\*sin, YU. A.; Lbov, A. A.; Sel'chenkov, L. I.

Fission yields and their mass distribution; a manual (Vy\*khody\* produktov deleniya i ikh raspredeleniye po massam; spravochnik). Moscow, Gosatomizdat, '63. 0117 p. illus., biblio., tables. 3,500 copies printed.

TOPIC TAGS: nuclear fission, fission fragments, fission fragment yield, fission fragment mass distribution, asymmetric fission, fine structure, excitation energy, fission induced by Gamma rays, fission induced by charged particles, decay chain

PURPOSE AND COVERAGE: This manual gathers together and generalizes extensive experimental material on yields of fission products and the mass distribution of fission fragments accumulated from 1939 through 1962. It covers nuclear fission induced by neutrons,  $\gamma$  rays, charged particles of excitation energy up to 100 MeV, and spontaneous fission. The data on the fission product yields are tabulated. Some general conclusions are drawn concerning the laws governing the mass distribution of fission fragments. The book is intended for engineering-physicists, scientific workers, and engineers working in the field of nuclear engineering and nuclear physics.

Card 1/2



AM4027870

TABLE OF CONTENTS

Introduction - - 3  
Absolute and relative yields of fission fragments - - 5  
Methods of determining yields of fission fragments - - 7  
Principal laws and characteristic features of the distributions of fission fragments by mass - - 10  
Tables of fragment yield - - 28  
Principal literature - - 112  
Supplementary literature - - 116

SUB CODE: PH, NS

SUBMITTED: 01Aug63

NR REF SOV: 049

OTHER: 194

DATE ACQ: 20Mar64

Card

2/2

SAKHAROV, A.D., akademik; LYUDAYEV, R.Z.; SMIRNOV, Ye.H.; PLYUSHCHEV, Yu.I.;  
PAVLOVSKIY, A.I.; CHERNYSHEV, V.K.; FEOKTISTOVA, Ye.A.; ZHARINOV, Ye.I.;  
ZYSIN, Yu.A.

Magnetic cumulation. Dokl. AN SSSR 165 no.1:65-68 N '65.

(MIRA 18:10)

L 7085-66 EWT(1) IJP(c)

ACC NR: AP5027837

SOURCE CODE: UR/0020/65/165/001/0065/0068

AUTHOR: Sakharov, A. D. (Academician); Lyudayev, R. Z.; Smirnov, Ye. N.; Plyushchev, Yu. I.; Pavlovskiy, A. I.; Chernyshev, V. K.; Peoktistova, Ye. A.; Zharinov, Ye. I.; Zysin, Yu. A.

ORG: none

TITLE: Production of very high magnetic fields by explosives

SOURCE: AN SSSR. Doklady, v. 165, no. 1, 1965, 65-68

TOPIC TAGS: pulsed magnetic field, flux compression, high field pulse, implosive flux compression, explosive flux compression, betatron particle acceleration, high density plasma, plasma accelerator/ MK 1, MK 2

ABSTRACT: Experiments with the MK-1 and MK-2 explosion devices for the production of very high magnetic field pulses are described. The MK-1 device, which is based on the implosion of an axial flux within a metal shell, essentially resembles the arrangement described by Fowler and others (J. Appl. Phys. 31, 1965, 588). The MK-2, which works on the principle of the expulsion of the field from the solenoid and the subsequent compression of the field by the walls of the coaxial liner, is described here for the first time. Field intensities of  $1 \times 10^6$  oe were obtained in experiments with an MK-1 using aluminum liners about 100 mm in diameter. In a subsequent experiment with a stainless steel liner with a copper plated inner surface, a field intensity of

Card 1/3

UNC: 538.1

L 7085-66

ACC NRI: AP5027837

25 x 10<sup>6</sup> oe was achieved by imploding the liner to a 4-mm diameter. A field intensity of 5 x 10<sup>6</sup> oe in a volume of 100 cm<sup>3</sup> was produced by a copper liner 300-mm in diameter using the MK-2 as the source of the initial field. The MK-2 has a central conductive cylinder enclosed in a coaxial helical solenoid. On one end of the solenoid is a solid cup. A hole in the bottom of the cup holds the end of the central cylinder (see Fig. 1). The central cylinder is filled with an explosive which is ignited from the



Fig. 1. The MK-2 device

end opposite that holding the cup. The solenoid cylinder system forms the circuit through which a battery of capacitances is discharged. At the peak value of the discharge current, the expanding conical flare of the cylinder created by the propagating explosion touches the end of the solenoid. The explosion's further development is equivalent to moving a cone into the solenoid and shorting its turns until the cone reaches the cup. At this moment a coaxial is formed whose length and inductance grow smaller as the detonation propagates further along the cylinder. The process is accompanied by a corresponding increase in current and field intensity resulting from compression of the flux. Currents of 5 x 10<sup>7</sup> amp (occasionally up to 1 x 10<sup>8</sup> amp) at an inductance value of 0.01 μH were obtained, and field intensities of 1 to

Card 2/3

L 7085-66

ACC NR: AP5027837

$1.5 \times 10^6$  os were recorded within a volume of several liters. An energy of 1 to  $2 \times 10^7$  J was stored in the field, which amounts to about 10 to 20% of the energy released during the propagation of the explosion within the length of the cup. A receiver of electromagnetic energy was connected to the MK-2 directly or via a transformer, depending on whether the receiver was of low or high inductance. About 50% of the explosive energy was transferred to the receiver by the latter method, which also permits a spatial separation of the sender and makes possible multi-stage arrangements. In the first stage, the initial field is created by a permanent magnet. The second and the subsequent stages amplify the field received from the preceding stage. Energy transfer was also accomplished by breaking the current-carrying circuit by means of an additional explosive charge and using the breaking surge for the transfer. More than 50% of MK-2 output was transferred by this method. A special MK device has been created for iron-free air core betatrons as described by Pavlovskiy and others (DAN, 160, no. 1, 1965, 68), and experiments have been carried out with electrodynamic accelerators of the coaxial type. Orig. art. has: 3 figures. [FP]

SUB CODE: EM, NP/ SUBM DATE: 23Aug65/ ORIG REF: 002/ OTH RHP: 001/ ATD PRESS: 7143

nw

Card 3/3

PAVLOVSKIY, A.I.; KULESHOV, G.D.; SKLIZKOV, G.V.; ZYSIN, Yu.A.; GERASIMOV, A.I.

Heavy-current air-core betatrons. Dokl. AN SSSR 160 no.1:68-70  
Ja '65. (MIRA 18:2)

1. Submitted November 16, 1964.

ZYSINA-MOLOZHEN, A. M.

"Determination of Turblent Transfer Constants in an  
Compressible Gas FLOW."

Report submitted for the Conference on Heat and Mass Transfer, Minsk,  
BSSR, June 1961.

AYDHA, I. H. and KUPATELASH, S. S.

"Eksperimental'noye issledovaniye teploperedachi pri kipenii rtutii"  
(Experimental Investigation of Heat Transfer during the Boiling of  
Mercury), Sovetskoye kotloturbostroyeniye, 1939, No. 9, pp. 279-283.



ZYSINA, L. (g. Ufa)

At the door of a dressmaking and tailoring establishment, Prom.  
koop. 13 no.3:19 Mr '59. (MIRA 12:4)

(Ufa—Clothing industry)

KUTATELADZE, Samson Semenovich. Primali uchastiye: LEONT'YEV,  
A.I.; BORISHANSKIY, V.M.; ZYSINA, L.M., doktor tekhn. nauk,  
retsenzent; GORDOV, A.N., kand. fiz.-mat. nauk, red.;  
ONISHCHENKO, R.N., red. izd-va; MITARCHUK, G.A., red. izd-va;  
SHCHETININA, L.V., tekhn. red.

[Fundamentals of the heat transfer theory] Osnovy teorii teplo-  
obmena. Izd.2., dop. i perer. Moskva, Mashgiz, 1962. 455 p.  
(MIRA 15:7)

(Heat—Transmission)

ZYSINA, L. M.

PA 16/49T46

USSR/Engineering  
Turbines - Blades  
Gas Flow - Measurements

May/June 48

"Small Gas Dynamics Testing Bench of the Central  
Boiler and Turbine Institute imeni I. I. Polzunov,"  
L. M. Zysina, Cand Tech Sci, 1½ pp

"Kotloturbostroye" No 3

Describes arrangements for studying gas flow through  
blading of new turbine designs. Includes five  
photographs.

16/49T46

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42																																																				
1ST AND 2ND GROUPS																																																				
PROCESSES AND PROPERTIES INDEX																																																				
ZY-SINA-MOLOZHEN, L.M.																																																				
<p><i>N</i> <span style="float: right;"><i>E</i></span></p> <p>The effect of pressure on the mechanism of steam formation in a boiling liquid. L.M. ZY-SINA-MOLOZHEN and N. S. Kuznetsov. Zhur. Tekh. Fiz. 20, 110-11 (1950) Jan. (In Russian).</p> <p>An experimental study of the mechanism of formation of vapor bubbles in a boiling liquid, under conditions of free circulation, showed the inadequacy of formulas frequently used for the calculation of the intensity of heat exchanges emanating from the German school of workers (Fritz, Physik. Z., No. 11(1935); Jacob and Linke, <i>ibid.</i>, No. 8(1936)); these formulas do not reflect the true role played by pressure in the mechanism of boiling.</p>																																																				
ASB-SLA METALLURGICAL LITERATURE CLASSIFICATION																																																				
<table border="1"> <tr> <td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td><td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td><td>30</td><td>31</td><td>32</td><td>33</td><td>34</td><td>35</td><td>36</td><td>37</td><td>38</td><td>39</td><td>40</td><td>41</td><td>42</td> </tr> </table>											1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42											

ZYSINA-MOLOZHEN, L. M.

USSR/Physics - Hydrodynamics

Nov 52

"Turbulent Boundary Layer During Longitudinal Pressure Drop," L. M. Zysina-Molozhen

"Zhur Tekh Fiz" Vol 22, No 11, pp 1756-1772

Describes the results of experimental investigation into the influence of longitudinal pressure drop on the development of boundary layer near a surface over which a compressible gas flows. Results of experiments agree with

236198

computations. On basis of an analysis of the experimental data, author recommends certain considerations in the computation of boundary layer in the turbulent and transitional regions.

236198

ZYSINA, MOLOZHEN, L.M.

Abst Journal: Referat Zhur - Mekhanika, No 12, 1956, 8362

Author: Zysina-Molozhen, L. M.

Institution: None

Title: Certain Data on the Number of Steam-Formation Centers on Technical Heating Surfaces

Original

Periodical: Coll: Vopr. teploobmena pri izmenenii agregatnovo sostoyaniya veshchestva, Moscow-Leningrad, 1953, Gosenergoizdat, 168-172

Abstract: Results are given of microscopic photography of the process of bubble boiling on a horizontal plate.

It is shown how the thermal load, pressure, and the state of the heating surface affect the number of steam-formation surface and the frequency at which the steam bubbles break away. The experiments were performed with water and with several aqueous solutions at pressures from one to 5 atm under moderate heat-flux densities.

Card 1/1

USSR/Physics - Gas dynamics

FD-998

Card 1/1 : Pub. 153 - 2/24

Authors : Zysilna-Molozhen, L. M., and Shapiro, I. G.

Title : Interferometric investigation into the circulation around cascades of turbine sections

Periodical : Zhur. tekhn. fiz., 24, No 6, 978-988, Jun 1954

Abstract : Expound results of a comparative interferometric investigation of two cascades of flat turbine sections. Compare data of optical investigation with results of pneumometric investigations. The work was carried out on the optical bench of the gas-dynamics laboratory of Division [otdel] No. 6 of TsKTI (central Scientific Research Boiler and turbine Institute) with the assistance of VNIIM (All-Union Scientific-Research Institute of Metrology).

Institution : -

Submitted : July 20, 1953

ZYSINA-MOLOZHEN, L.M., kandidat tekhnicheskikh nauk

Calculation of losses in profile cascades of turbomachinery. [Trudy]

TSKTI no.27:20-51 '54.

(MLRA 8:12)

(Gas flow) (Gas turbines)



ZYSINA, -MOLOZHEN, L.M., kandidat tekhnicheskikh nauk; SHAPIRO, I.G.,  
inzhener

Interferometric investigation of flow through a cascade of  
compressor blades. [Trudy] TSETI no.27:134-151 '54.

(MIRA 8:12)

(Gas flow) (Interferometry) (Compressors)

Subject : USSR/Engineering AID P - 1327  
Card 1/1 Pub. 110-a -- 9/19  
Authors : Zysin, V. A., Zysina-Moiozhen, L. M., Kand. of Tech. Sci.,  
Polyakov, K. S. and Shapiro, I. G., Engineers  
Title : Interferometrical study of a flow around turbine bladings  
at trans- and supersonic speed  
Periodical : Teplcenergetika, 2, 38-42, F 1955  
Abstract : The results of interferometrical studies are outlined con-  
cerning the flow at trans- and supersonic speed around  
turbine bladings at different values of the inflow angle  
and of the pitch. Based on experimental data of a two-  
dimensional flow some considerations are presented rela-  
tive to the most favorable parameters of the bladings  
analyzed from the point of view of blade losses. Photos,  
charts, 2 Russian references (1953-1954).  
Institution : Central Scientific Research Institute of Boilers and  
Turbines  
Submitted : No date

ZHUKOVSKIY, V.S., doktor tekhnicheskikh nauk, professor; ZHUKOVSKIY, M.I., kandidat tekhnicheskikh nauk; ZYSINA-MOLOZHEN, kandidat tekhnicheskikh nauk; MARKOV, N.M., kandidat tekhnicheskikh nauk; SKNAR', N.A., kandidat tekhnicheskikh nauk; TYRYSEKIN, V.G., kandidat tekhnicheskikh nauk

M.E.Deich's book "Technical gas dynamics." Reviewed by V.S.Zhukovskii and others. Teploenergetika 2 no.1:62-64 Ja '55.

(MLRA 8:9)  
(Turbines--Fluid dynamics) (Gas flow) (Deich, M.E.)

ZYSINA-MOLOZHEN, L.M.

Subject : USSR/Engineering AID P - 1832  
Card 1/1 Pub. 110-a - 9/16  
Authors : ~~Zysina-Molozhen, L. M.~~, Kand. of Tech. Sci., and  
Shapiro, I. G., Eng.  
Title : Some data on the supersonic flow through the turbine  
blading  
Periodical : Teploenergetika, 3, 34-37, Mr 1955  
Abstract : The authors make an interferometric study of  
supersonic velocities accompanied by the  
emergence of jumps of compression and the resulting  
increase of losses in turbine blading. From inter-  
ferograms they attempt to obtain data about ways to  
remove possibilities of locking compression jumps  
in inter-blading disk spaces. Nine photographs and  
diagrams.  
Institution: Central Institute of Boilers and Turbines.  
Submitted : No date

*Approximate Method of Calculating Losses*

Subject : USSR/Engineering AID P - 2766  
Card 1/1 Pub. 110-a - 8/14  
Author : Zysina-Molozhen, L. M., Kand. Tech. Sci.  
Title : ~~Approximate method of calculating losses in blading~~  
Periodical : Teploenerg., 9, 43-48, S 1955  
Abstract : An analysis of experimental data compared with mathematical analysis in the computation of different blade-entrance angles and their corresponding losses. Nine diagrams. Six Russian references, 1940-1954.  
Institution : Central Boiler and Turbine Institute  
Submitted : No date

USSR/Physics - Aerodynamics

FD-3207

Card 1/1      Pub. 153-16/28

Author        : Zysina-Molozhen L. M.

Title         : Study of transition from laminar to turbulent flow on the boundary layer

Periodical    : Zhur. Tekh. Fiz., 25, No 7, 1280-1287, 1955

Abstract      : Attempt is made to establish a semi-empirical evaluation of the effect of the transition region on the flow in the boundary layer. This method facilitates the computing of parameters of the transitional boundary layer, similarly to purely laminar or purely turbulent flow. The comparison of plotted theoretical and experimental curves show satisfactory accuracy of semi-empirical relations of the transition region. Nine references, including 3 foreign.

Institution    :

Submitted     : December 2, 1954

ZYSINA-MOLOZHEN, L. M.

FD-3208

USSR/Physics - Aerodynamics

Card 1/1 Pub. 153-17/28

Author : Zysina-Molozhen L. M.

Title : Some quantitative characteristics of transition from laminar to turbulent flow in the boundary layer

Periodical: Zhur. Tekh. Fiz., 25, No 7, 1288-1296, 1955

Abstract : Experimental results obtained in a special wind tunnel (L. M. Zysina-Molozhen, Tr. TsKTI, 22, 1952) are analyzed. The boundary layer was studied along a plate surface during flow around it by a gradientless stream and a stream with longitudinal pressure gradient, or flow around a cascade profile. (L. M. Zysina-Molozhen, Tr. TsKTI, book 22, 1952) Quantitative characteristics of the extent of the transition region could be approximately established. Indebted to Drs A. A. Gukhman and L. G. Loytsyanskiy for discussions. Ten references, including one US.

Institution: --

Submitted : December 12, 1954

Subject : USSR/Engineering AID P - 5106

Card 1/1 Pub. 110-a - 9/18

Author : Zysina-Molozhen, L. M., Kand. Tech. Sci.

Title : ~~Semiempirical method for calculating the parameters of a two-dimensional boundary layer in the transition zone.~~  
Semiempirical method for calculating the parameters of a two-dimensional boundary layer in the transition zone.

Periodical : Teploenergetika, 10, 41-47, 0 1956

Abstract : The above method is based on the generalization of experimental data on velocity profiles in the transition zone of the boundary layer of a flow around a plate. The author considers the calculation of the boundary layer with a longitudinal pressure gradient. 10 diagrams. 15 references.

Institution : Central Institute for Boilers and Turbines

Submitted : No date



ZYSINA-MOLOZHEN, L. M. Doc Phys-Math Sci -- (diss) "Certain  
Problems of Resistance and Heat Loss <sup>circumflow</sup> ~~relating to~~ doktricheskoye [?]  
~~Streamline-Flow~~ <sup>Circumflow.</sup>" Len, 1957. 30 pp 20 cm. (Min of  
Higher Education USSR, Len Polytechnic Inst im <sup>of</sup> M. I. Kalinin),  
100 copies (KL, 28-57, 109)

AUTHORS: Zysina-Molozhen, D.M. (Leningrad)

24-10-4/26

TITLE: Approximate method of calculation of the heat transfer in blade cascades. (Priblizhennyy metod rascheta teplotdachi v reshetkakh profiley).

PERIODICAL: Izvestiya Akademii Nauk SSSR, Otdeleniye Tekhnicheskikh Nauk, 1957, No.10, pp. 28-35 (USSR)

ABSTRACT: This paper was read at the 8th Conference on Heat Exchange in Gas Turbines convened by ENIN AN SSSR, Kiev, Oct.13, 1955. An approximate method is described of calculating the average coefficient of heat transfer which is suitable for carrying out the preliminary calculations. The author considers a lattice which is diagrammatically represented in Fig.1, p.29, and the investigation is limited to the flow through the cascade between the planes 1<sub>0</sub> located at a great distance in front of the lattice and 2<sub>0</sub> located at a great distance behind the lattice, where all the non-uniformities of the flow due to the presence of the lattice have been equalled out. The section passing through the trailing edge plane is denoted by 3 and it is assumed that at some distance from the plane of the trailing edges in the section denoted by 2 the temperature and the speed boundary layers of the trailing edges are identical, which is correct only for  $M_{\infty} < 1$ . With these and further

Card 1/3

Approximate method of calculation of the heat transfer in blade  
, cascades. 24-10-4/26

angles for all the Reynold number values under  
consideration.

There are 2 figures and 10 references, 9 of which are  
Slavic.

SUBMITTED: December 14, 1955.

AVAILABLE: Library of Congress.

Card 3/3

ZYSINA-MOLOZHEN, L. M., SHAPIRO, I. G. (Leningrad)

"On the Heat Transfer in Turbulent Compressible Flows."

report presented at the First All-Union Congress on Theoretical and Applied Mechanics, Moscow, 27 Jan - 3 Feb 1960.

p. 5  
PHASE I BOOK EXPLOITATION

SOV/4519

Gukasova, Yekaterina Aleksandrovna, Mikhail Isaakovich Zhukovskiy, Anatoliy Mikhaylovich Zavadovskiy, Larisa Mikhaylovna Zysina-Molozhen, Nikolay Akimovich Sknar', and Vsevolod Georgiyevich Tyryshkin

Aerodinamicheskoye sovershenstvovaniye lopatochnykh apparatov parovykh i gazovykh turbin (Aerodynamic Improvement of Blading in Steam and Gas Turbines) Moscow, Gosenergoizdat, 1960. 340 p. Errata slip inserted. 4,000 copies printed.

Eds.: V.S. Zhukovskiy, Doctor of Technical Sciences, Professor, and S.S. Kutateladze, Doctor of Technical Sciences, Professor; Tech. Ed.: O.S. Zhitnikova.

PURPOSE: This book is intended for engineers working in turbine-construction plants, design offices, and power systems, and may also be used by aspirants and students of advanced courses in power-machinery construction at schools of higher education.

COVERAGE: The book discusses aerodynamic methods for investigating, profiling, and improving the blading of steam and gas turbines. Methods for calculating the potential flow about airfoil cascades and for determining energy losses on the basis

Card 1/9

## Aerodynamic Improvement of Blading (Cont.)

SOV/4519

of the boundary-layer theory are presented. Also discussed are methods for experimental study of the flow about blades in stationary cascades (with consideration of three-dimensional phenomena) and on rotating models. A special chapter (IX) treats the results of aerodynamic profiling of new blade cascades. The results presented are based on work performed at TsKTI imeni I.I. Polzunov. The authors thank Professor L.G. Loytsyanskiy for his advice. There are 124 references: 106 Soviet, 10 English, and 8 German.

## TABLE OF CONTENTS:

Foreword	6
Ch. I. Theoretical Methods of Calculating Incompressible Flow Through Cascades of Airfoils (M.I. Zhukovskiy)	11
1. Plane rectilinear cascade	11
2. Calculating a cascade of blades according to a given velocity triangle	15
3. Solution of a direct problem based on conformal mapping of the region of incompressible fluid flow in an auxiliary plane	23
4. Inverse problem for a cascade of airfoils	28
5. Calculating flow over a cascade of airfoils according to a known circulation flow for an angle $\beta_1$	30
6. Calculating flow in curvilinear channels	33

Card 2/9

Aerodynamic Improvement of Blading (Cont.)

80V/4519

Ch. II. Calculating Flow-Through Cascades at Subsonic Velocities (M.I. Zhukovskiy)	39
1. Isentropic motion of a compressible fluid	39
2. Subsonic flow of a gas through a cascade of airfoils	45
Ch. III. Approximate Method of Calculating Profile Losses in Cascades (L.M. Zysina-Molozhen)	48
1. Comparative evaluation of the precision of some methods of calculating profile losses	48
2. Method of calculating the size of impulse loss at the rear edge in flow through a cascade of airfoils	58
3. Determination of the dimensions of the transition region in the boundary layer of an airfoil	64
4. Sequence of the procedure of calculating the size of impulse loss at the rear edge in flow through a cascade of airfoils	70
5. Comparison of calculations with experimental values of losses in flow through impulse and reaction cascades of airfoils	76
6. Comparison of calculations with experimental values of losses in flow through the cascade of airfoils of a compressor	82

Card 3/9

Aerodynamic Improvement of Blading (Cont.)

SOV/4519

Ch. IV. Fundamentals of Modeling Aerodynamic Processes in a Turbine Cascade of Blades (N.A. Sknar')	87
1. Principles of modeling	87
2. Criteria of similitude and aerodynamic characteristics of cascades	88
3. Characteristic features of approximate modeling	91
Ch. V. Experimental Determination of Aerodynamic Characteristics of Cascades of Airfoils (Ye.A. Gukasova and N.A. Sknar')	100
1. Basic requirements for experimental methods	100
2. Preparation of the inflowing stream	101
3. Experimental cascades	105
4. Shaping the stream at the outflow from the cascade of blades	109
5. Experimental units	113
6. Measuring methods in the investigation of cascades in a compressible gas	116
7. Methods of working out experimental data	122

Card 4/9



## Aerodynamic Improvement of Blading (Cont.)

SOV/4519

Ch. VI. Optical Methods of Investigating Plane Cascades of Airfoils  
(L.M. Zysina-Molozhen)

	126
1. General principles of the shade method and its application in investigation of flow about bodies	127
2. Application of Toepler's method in investigation of flow through cascades of airfoils	130
3. Principle of interference	133
4. Description and adjustment of an interferometer	136
5. Photographing the interference picture	139
6. Determination of the physical density of the investigated medium by the combination of bands. Numeration of bands	141
7. Determination of the density in the presence of uncombined interference bands in the field of vision	144
8. Determination of density in the absence of uncombined interference bands in the field of vision	145
9. Obtaining the scalar representation of the interferogram	146
10. Calculation of basic gas dynamic parameters	146
11. Some results of interferometric investigation of flow about bodies	151

Card 5/9

Aerodynamic Improvement of Blading (Cont.)

SOV/4519

12. Sample calculation of the characteristics of flow through a cascade of compressor airfoils according to an interferogram	155
Ch. VII. Three-Dimensional Flow in Cascades of Blades and End Losses (Ye.A. Gukasova)	158
1. Structure of three-dimensional flow at the ends of blades. Mechanism of the formation of end losses	158
2. Experimental methods for studying three-dimensional flow in banded cascades	176
3. Influence of geometric characteristics of cascades and flow parameters on end losses in banded cascades	181
4. Generalized empirical relationship for calculation of end losses in banded cascades	189
5. Characteristic features of three-dimensional flow through straight banded cascades in the presence of overlapping and axial clearances	193

Card 6/9.

Aerodynamic Improvement of Blading (Cont.)		SOV/4519
Ch. VIII. Experimental Investigation of Plane Cascades at High Subsonic and Supersonic Velocities (Ye.A. Gukasova)		198
1. Flow of a compressible gas in cascades of nozzles		198
2. Flow of a compressible gas in cascades of buckets		212
Ch. IX. Some Results of Aerodynamic Profiling and Finishing-off of Turbine Airfoils for Subcritical Flows at TsKTI (M.I. Zhukovskiy and N.A. Sknar')		219
1. General aspects		219
2. Vane profiles		221
3. Bucket profiles		222
4. Efficiency of new profiles		222
5. Influence of the method of formation of strengthened outflow edges on the operation of cascades		224
Ch. X. Methods of Experimental Investigation of Turbine Stages in Conditions of Rotation on Models at TsKTI (A.M. Zavadovskiy)		230
1. General aspects		230
2. Aerodynamic characteristics		238

Card 7/9

Aerodynamic Improvement of Blading (Cont.)

SOV/4519

Ch. XI. Losses in a Turbine Stage and Consideration of the Possibility of Calculating the Basic Characteristics of the Stage (A.M. Zavadovskiy)	245
1. Profile and end losses	245
2. Fan losses	252
3. Losses due to leakage through radial clearances in nonshrouded vanes	258
4. Losses due to leakage through axial clearances in stages with shrouded vanes	266
5. Losses due to leakage through gaps in contacts of working-wheel shrouds	267
6. Influence of suction and induction in a turbine stage with shrouded vanes	270
7. Losses due to the flow of the working fluid in channels of a turbine stage with negative reaction	272
8. Some considerations on the possibility of determining basic characteristics of a turbine stage by calculation	276

Card 8/9